

Model : SPP-MTHE70

70m HD BaseT HDMI Extender




- Support uncompressed HDMI HD signals
- Support to transmit 10.2Gbps HDMI signals
- RS232 serial port signal over Cat5e/6 cable
- Support transmission distance: 1080P@60Hz 70m, 4Kx2K@30Hz 35m
- Support 340 MHz, bandwidth 10.2G
- Support 3D, CEC
- Support uncompressed audio formats, such as LPCM
- Compression Audio formats that support , such as: DTS Digital, Dolby Digital (include DTS-HD and Dolby True HD)
- Support POC single-end power supply, at the receiving end or end of the transmitter

Specifications :

HDCP version	HDCP1.4
Supported resolution	1080P/1080i/720P/576P/576i/480P/480i
Transmitter Distance	Resolution: 1080P up to 70m; 4K@30Hz up to 35m
Supported colour depth	deep colour 24bit/36bit/48bit
Supported audio format	LPCM/Dolby-AC3/DTS7.1/DSD
Operation humidity	5 to 90%RH (No Condensation)
Operation temperature	-15 to +55 °C (5 to 131 °F)
Power Adapter	Input AC(50Hz.60Hz)100-240V
Power supply	DC12V

Connection Diagram :

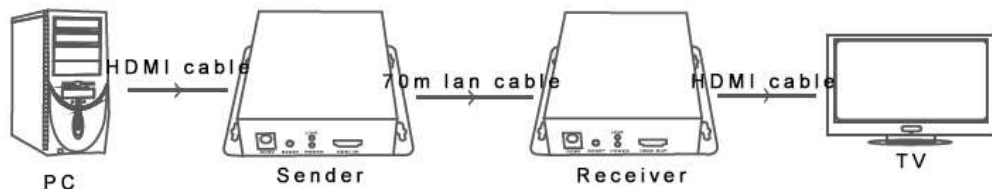

Application Diagram :

