

## Model : SPP-MTHM404

### HDMI Matrix switch with 1080P




- Support 4 HDMI input, 4 HDMI output, input and output can be switched at will
- Support the highest resolution 1080P@60Hz
- Support 36 bit deep color display
- Support 3D video technology
- Support HD digital audio such as: Dolby, TRUEHD, DTS-HD, Master Audio
- Support EDID read and write function
- With save mode, up to 4 groups scene can be maintained
- Power support DC 5V

#### Specifications :

Input port	4 x HDMI
Output Port	4 x HDMI
The height of device	1U
Resolution	480i, 576i, 480p, 576p, 720p 1080i, 1080p@24/30/50/60/ 120Hz, 1080P3D@60Hz,
Console port	1x RS-232 IN
Protocol standard	Support HDMI1.4a, EDID management and rewritable
ESD protect	Human body discharge mode: ± 8kV (air gap discharge) ± 4kV (contact discharge)
Port selected	Panel button, RS232, IR remote
Gain adjustment	Adjust the gain for longer distance transmission
Power adapter	DC5V/2A
Dimension (mm)	29 x 13 x 4 (mm )
Weight	1.6Kg
Operation Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	-20 °C~60 °C/-4 °F~140 °F

**Panel introduction:**

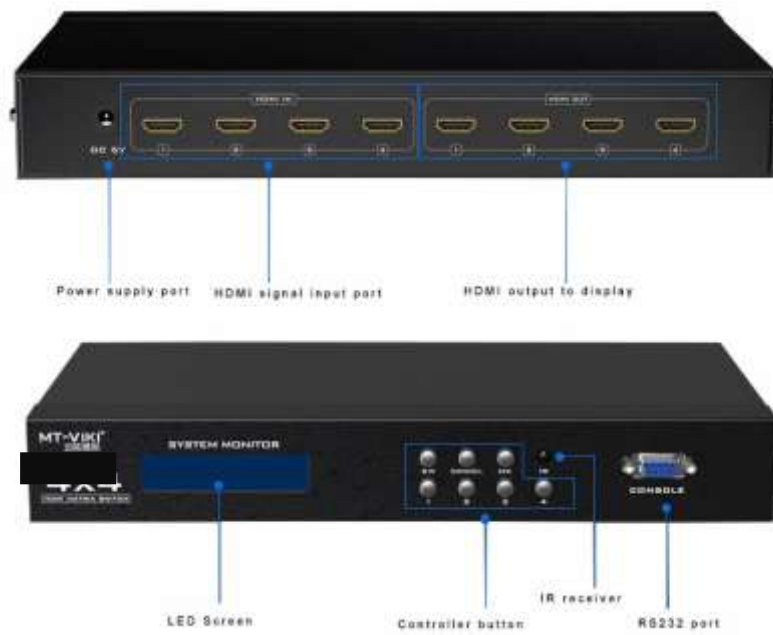

**Connection Diagram:**

