

Model : SPP-MTHM4K404

4 x 4 HDMI Matrix switch




- 4 x 4 out HDMI Matrix Switch
- Each channel supports HDCP decoding, Blue-ray, 3D
- Support 36 bit deep color display
- Support HDMI : 4K x 2K@30Hz, 1080P@120Hz, 1080P 3D@60Hz
- Support button, IR control, RS232 serial port and other control methods, optional WEB control
- Support EDID read and write function
- The cable with high-quality HDMI 1.4 Cable, the input transmission distance is up to 20 meters and the output transmission distance can reach 25 meters.
- Power-down memory field protection function automatically save the current scene state

Specifications :

Input port	4 x HDMI
Output Port	4 x HDMI
The height of device	1U
Resolution	480i, 576i, 480p, 576p, 720p 1080i, 1080p@24/30/50/60/ 120Hz, 1080P3D@30Hz,
Console port	1x RS-232 IN, 1 x RJ-45 Lan
Protocol standard	Support 4K 30Hz, EDID manage and rewrite, HDCP
Electrostatic protection	Human discharge mode: ± 8kV (air gap discharge) ± 4kV (contact discharge)
Control method	Standard button, RS232, IR control switching; optional WEB, APP control
Input voltage	Power AC 100V ~ 260VAC, 50/60 Hz
Power adapter	AC:110V-240V 50/60Hz DC:12V
Consumption	8W
Dimension (mm)	448x250x45 (mm)
Weight	4Kg
Operation Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	-20 °C~60 °C/-4 °F~140 °F

Panel introduction:

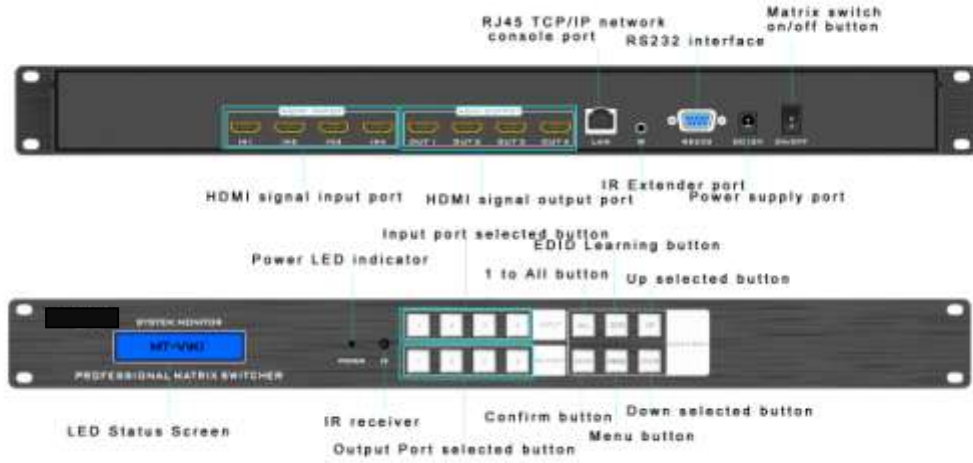

Connection Diagram:

