

Model : SPP-MTHWS201

2 way Bi-directional HDMI Switch



- 2 roads HDMI signal to 1 HDMI monitor
- 1 HDMI signal to 2 HDMI monitors
- No power
- Max. Operation current: 15mA
- Control method: press button
- 2 LED indicator
- Support 3D, 1080p, 4k x 2k@60Hz
- Input support 5m AWG26 standard cable, output support 5m AWG26 cable
- Housing: Metal

Specifications :


Input DDC signal	5V P-P(TTL)
Resolution	Up to 4K@60Hz
Vertical frequency range	50/60 Hz
Video amplifier bandwidth	340MHz/ 3.4Gpbs
Staggered(50 &60 HZ)	480i, 576i, 1080i
Progressive	480p, 576p, 720p, 1080p, 216p
Operate Temp	0°C- 70°C
Storage Temp	-10°C- 80°C
Operate Humidity	10% to 90% (No condensation)
Storage Humidity	5% to 90% (No condensation)
Consumption	5W

Port introduce:



Connection Diagram:

1 input 2 output

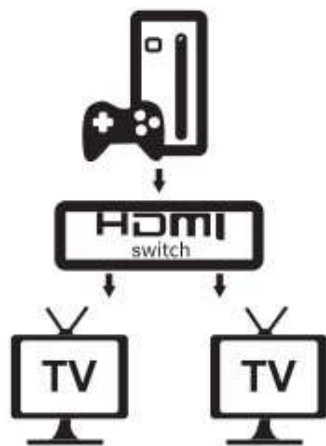

2 input 1 output

